



FlexMount

GLUNZ & JENSEN 



PRECISION. ROBUSTNESS. REPEATABILITY.

For more than 40 years Glunz & Jensen has been the world's leading and most trusted provider of equipment and solutions for the global prepress industry.

We invest heavily in simpler and more efficient technologies to help drive profitability and productivity for our flexo customers.

We are developing fully automated, integrated systems that improve process optimisation and deliver more accurate, faster results with less manpower, lower operating costs and with no risk of costly human error.

We produce complete flexographic platemaking solutions for all flexo plates in the market, while having the largest installed base of flexo processing equipment in the world.

Our family of FlexMount mounting tables combines precise mechanics with robust components in order to achieve outstanding results.

The Glunz & Jensen FlexMount enables highly productive and extremely precise mounting of any flexographic plate, allowing you to optimize your production to the highest accuracy, repeatability and productivity.

FlexMount 500

The FlexMount 500 is a manually operated plate mounter designed for narrow web and label printing applications. This very handy and ergonomic model is particularly well suited for mounting 1 plate per sleeve. Due to its convenient table-top design, it will easily fit in the production area at any label printer.

The FlexMount 500 is equipped with a fixed cantilever shaft; exact shaft dimensions will be prepared based on your specific cylinder dimensions, up to a maximum size of 500 mm (19.68") in width and 610 mm (24") in repeat. The two-camera system enlarges microdots and registration marks by 40 times magnification and displays them directly on a LCD monitor. This ensures high precision during mounting.



FlexMount 850/1280

The FlexMount 850/1280 is a floor standing manually operated plate mounter designed for mid-web applications.


It is equipped with a fixed cantilever shaft; exact shaft dimensions will be prepared based on your specific cylinder dimensions, up to a maximum size of 850 mm/33.4" (850 model) and 1280 mm/50.4" (1280 model) in width and 760 mm (29.9") in repeat.

Pneumatically controlled tables help facilitate the ease of plate mounting. The two-camera system enlarges microdots and registration marks by 40 times magnification and displays them directly on a LCD monitor. A digital LED display provides precise mounting locations.




FlexMount 1320/1700

The FlexMount 1320/1700 is the premium product in our FlexMount series. Semi-automatically controlled, it comes with a fixed mounting cylinder, along with a two-camera system magnifying the registration marks by 40 times. A fiber optic light beam assists the operator in positioning the plate, this saves valuable time in plate mounting. The fixed mounting cylinder is driven by a torque motor providing extremely high accuracy during rotation. The PLC control features a graphic user interface, where up to 2000 jobs can be registered. Data can be retrieved and uploaded as spread sheets. A unique Fast Mounting Strip assists the operator in smoothly navigating through the entire plate mounting process. An optional rubber roller system ensures quick and safe plate fixing, without air bubbles.

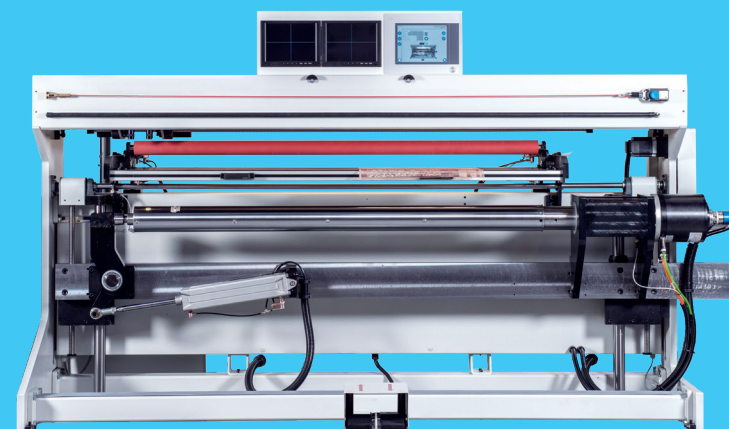

FlexMount 1320/1700

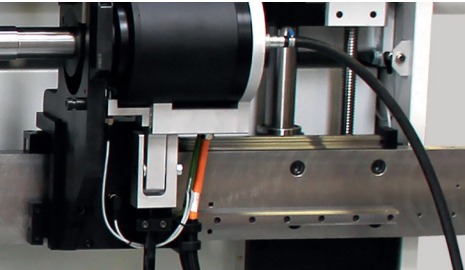

The maintenance free torque motor for positioning plates has an absolute position of $\pm 0,011$ mm on a repeat of 580 mm. The motor contains no gears, minimising overall wear.





Up to 2000 jobs can easily be registered in the operator panel of the FlexMount. Data can be retrieved and uploaded as spread sheets.

The two cameras in the FlexMount are computer-controlled and motor-driven, which ensures fast and accurate positioning.





FlexMount 500/850/1280

LCD monitor with 40 times magnification. A digital readout displays exact position for the operator.

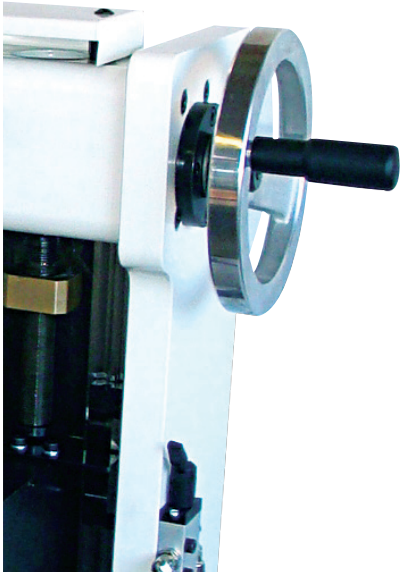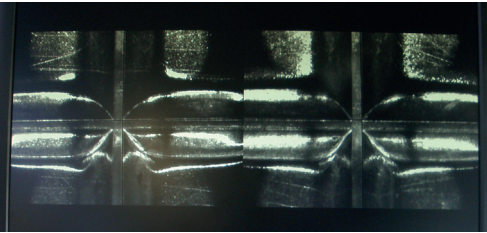

The shaft height in the FlexMount is manually adjustable.

Fiber optic, LED light spots project onto the plate surface for quick pre-positioning.

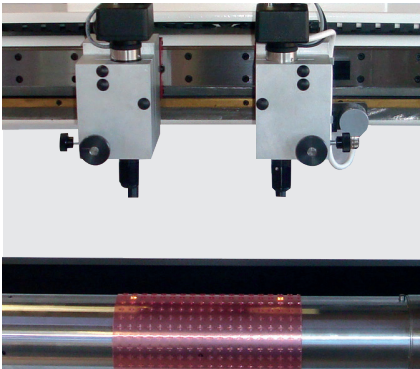

The ergonomically sound Fast Mounting Strip can be reached from anywhere, regardless of the operator's position. The Fast Mounting Strip supports the operator by intuitively going through the mounting process step-by-step.

	FlexMount				
MODEL	500	850	1280	1320	1700
PERFORMANCE					
Plate types	All flexographic photopolymer plates				
Max. printing width/cylinder length	500 mm (19.68")	850 mm (34.4")	1280 mm (50.4")	1320 mm (51.9")	1700 mm (66.9")
Max. repeat length	610 mm (24")	760 mm (29.9")		1016 mm (11.0 - 39.9")	
Precision (movable positions)	± 0.01 mm (0.0004")	± 0.01 mm (0.0004")		± 0.01 mm (0.0004")	
CONNECTION					
Power consumption	0.07 kW	0.2 kW		2.5 kW	
Power supply	1W + N + PE, 230 VAC, 50/60 Hz 2W + PE, 110 VAC, 50/60 Hz			3W + N + PE 50/60 Hz	
Grounding	< 0.1 (Ohm) ground bar to equipment frame and to electrical supply ground				
Temperature range	15°C/59°F - 30°C/86°F				
Relative humidity	40% - 60%, non-condensing				
GENERAL					
Dimensions (L × W × H)	920 × 480 × 940 mm 36.2 × 18.9 × 37.0")	1500 × 1411 × 1508 mm (59.1 × 55.5 × 59.3")		2930 × 910 × 1690 mm (115.3 × 35.8 × 66.5")	
Weight excl. Crate	150 kg (374 lbs)	1000 kg (2205 lbs)		1500 kg (3042 lbs)	
Standard	Technical documentation. Two manually driven cameras with digital readout. Cantilevered shaft. LCD monitor, 40 times enlargement. Dividing head, 12 manual steps. Fiber optic, LED light spots projected on sleeve surface for quick pre-positioning. Shaft height manually adjustable.			Fast Mounting Button. Full technical documentation. Semi-automatic sleeve change, air management system for sleeve change. Interchangeable mounting cylinder in steel. Fiber optic, LED light spots projected on sleeve surface for quick pre-positioning.	
Accessories	Table plate system, 2 table plates.			Rubber roller system: 1 rubber roller full size (1320/1700 mm) for removal of air bubbles. Mounting cylinder with air valve. Special repeat length, max. 1200 mm (cylinder drawing required). Easy Reg for W&H (requires fixed shaft). Proofing option on request.	

Note: Specifications are subject to changes without prior notice.

Learn more about FlexMount
by scanning this QR code.



Glunz & Jensen (Headquarters)
Selandia Park 1
4100 Ringsted, Denmark
+45 5768 8181
gj@glunz-jensen.com

Glunz & Jensen s.r.o.
Kosicka 50
08001 Presov, Slovakia
+421 51 7563 811
skpr@glunz-jensen.com

Glunz & Jensen Inc.
2185 Hwy. 292
Inman, SC 29349, USA
+1 864 568 4638
gj-americas@glunz-jensen.com

GLUNZ & JENSEN 

www.glunz-jensen.com